


PP Strap	width	19 mm (3/4")
	thickness	0.8 – 1.0 mm (.031 - .040)
PET Strap	width	16 - 19 mm (5/8 – 3/4")
	thickness	0.8 – 1.3 mm (.031 - .054)
Tension Range		400 – 3300 N (88 – 730 lbf)

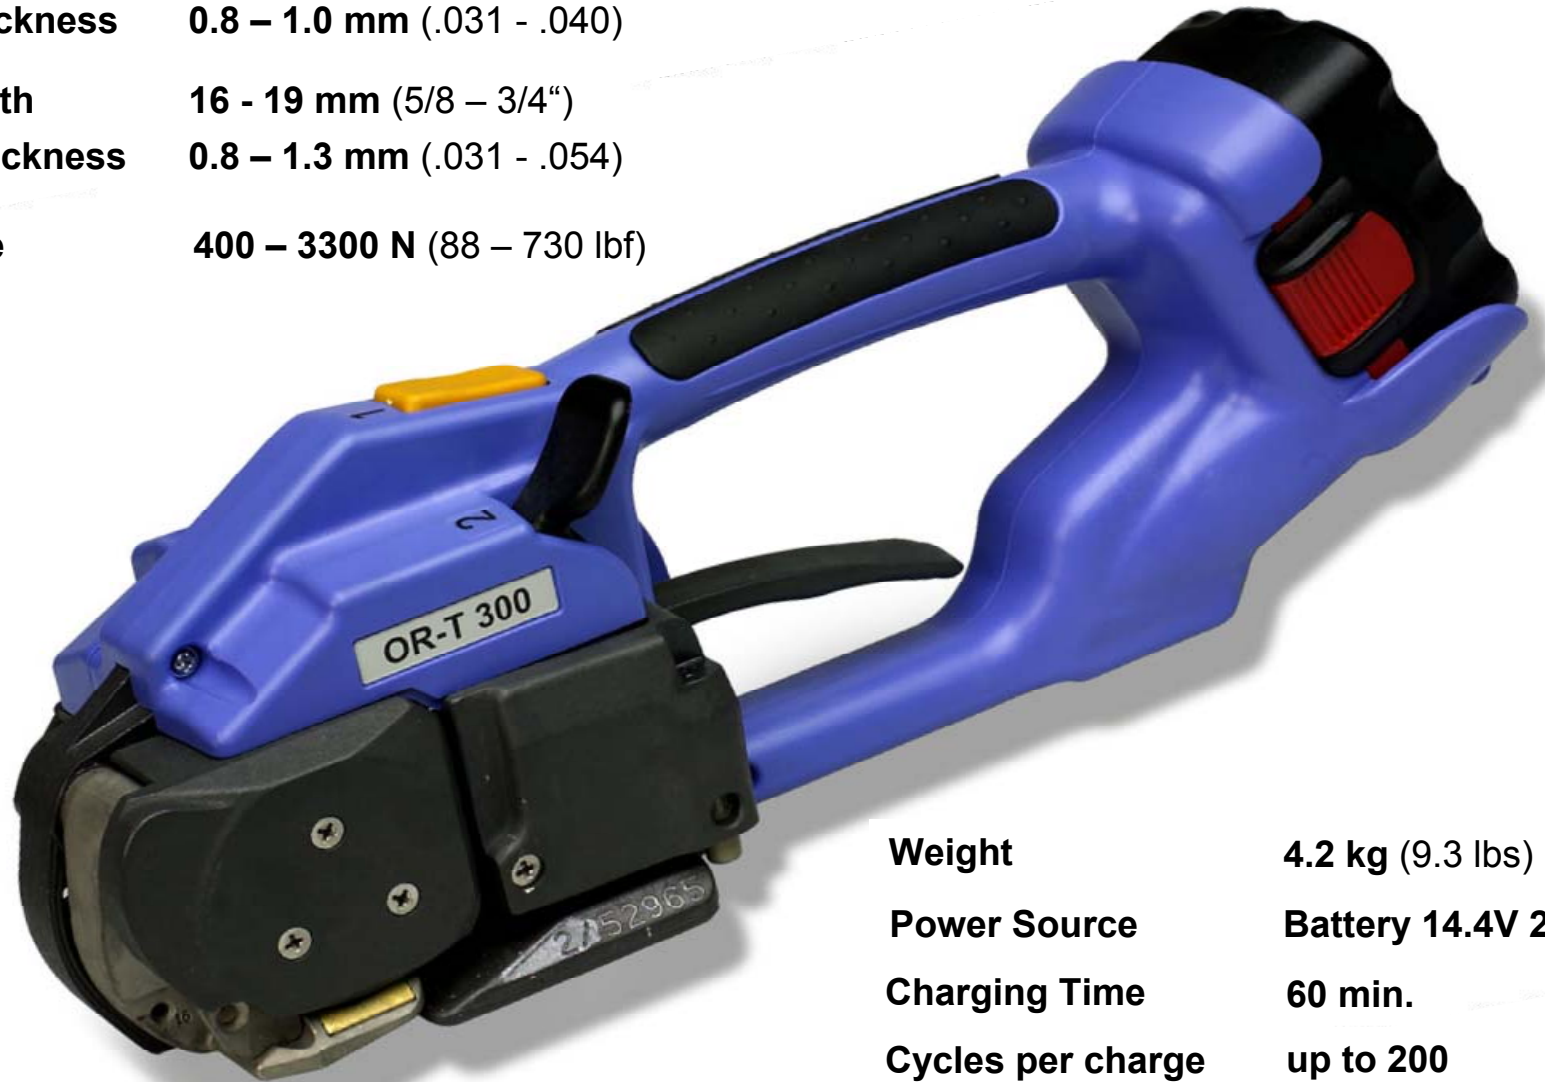

OR-T 300

Weight	4.2 kg (9.3 lbs)
Power Source	Battery 14.4V 2.4Ah
Charging Time	60 min.
Cycles per charge	up to 200
Options	suspension bow protection plate
Introduction	April 2005